


PROVEN PERFORMANCE SINCE 2010 | SUPPORTS LEED® CREDITS

ANCHOR™ WOODGRAIN FIXTURE GRADE is specially engineered for slatwall applications and the store fixture market. It carries industry-leading internal bond strength (IB), along with a light and consistent color that laminates seamlessly. Extensive testing determines ANCHOR™ is up to 50% stronger than premium MDF in slatwall applications. Engineered for Interior Use Only.

WOODGRAIN PARTICLEBOARD COMPLIES WITH:

EPA TSCA Title VI, HUD 24 CFR 3280, CCR 93120 CARB ATCM Phase 2, CAN/CSA-0160-16 (Formaldehyde Emissions)
 ECC CPA 4-11 (Sustainability); ANSI A208.1 2016 (Physical Properties)
 Flame spread rating is class C (International Code Council – International Fire Code® and National Fire Protection Association 101 Life Safety Code®) as tested to ASTM E84 and CAN/ULC-S102-10.

ANCHOR™ WOODGRAIN FIXTURE GRADE VS. PREMIUM 48# MDF SLATWALL SUBSTRATE STATISTICAL VALUE COMPARISON***

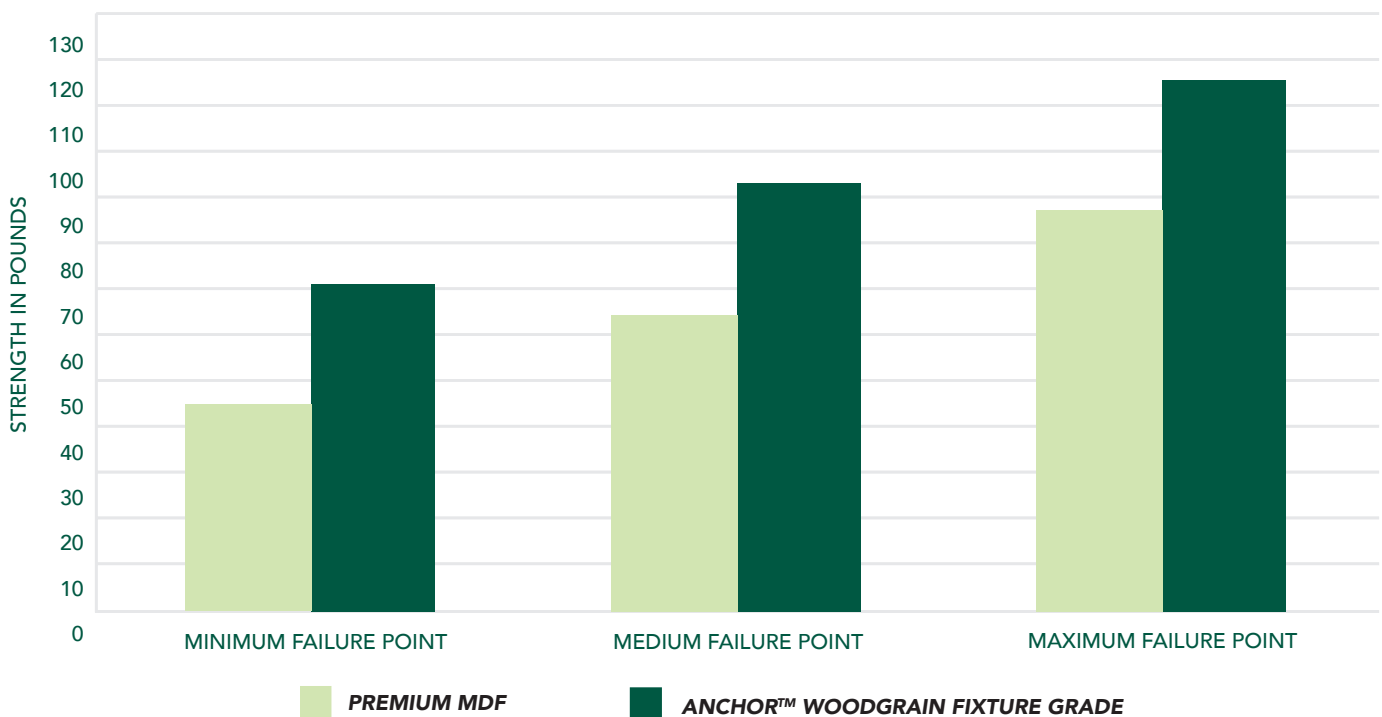

MANUFACTURING TOLERANCES	IMPERIAL	METRIC (SI)
Thickness Average from Target Value*	±0.005 in	±0.127 mm
Thickness Range (within panel) from Panel Average Value	±0.004 in	±0.1016 mm
Length and Width (within panel) from Specified Size	±0.0625 in	±1.5875 mm
Squareness (within panel) Maximum Deviation Between Diagonal Measurements	0.125 in	3.175 mm
Straightness (within panel) Maximum Bow per 8' Length	0.0625 in	1.5875 mm

*Target value 0.005 under nominal

*** 2 inch slatwall bracket offset by 3 inch Slatwall is typically made from a 3/4" panel, where there is a 1/4" lip, a 1/4" T, and a 1/4" back. If T is cut too deep, breakout may occur when fastened to wall.

